

EcoPack EP-FM6S

Catalogue no.: E1003

Full name: **Backpack Extinguishing Device with Breathing Apparatus**



System type:




Application:



Technical parameters:

Extinguishing agent	:	Water and 1% Telesolv foaming agent
Nominal charge	:	6 L
Working medium	:	Nitrogen
Working pressure	:	15 bar in temp. 20°C
Max. stream range	:	Mist 3.5 m, jet 8 m
Working duration	:	Mist 40 s, jet 22 s
Working temperature	:	+5°C to +60°C
Storage temperature	:	+5°C to +60°C
Storage humidity level	:	30% to 80%
Total weight	:	17.1 kg
Oxygen cylinder pressure	:	300 bar
Oxygen cyl. working dur.	:	20 min

STRUCTURE / COMPONENTS

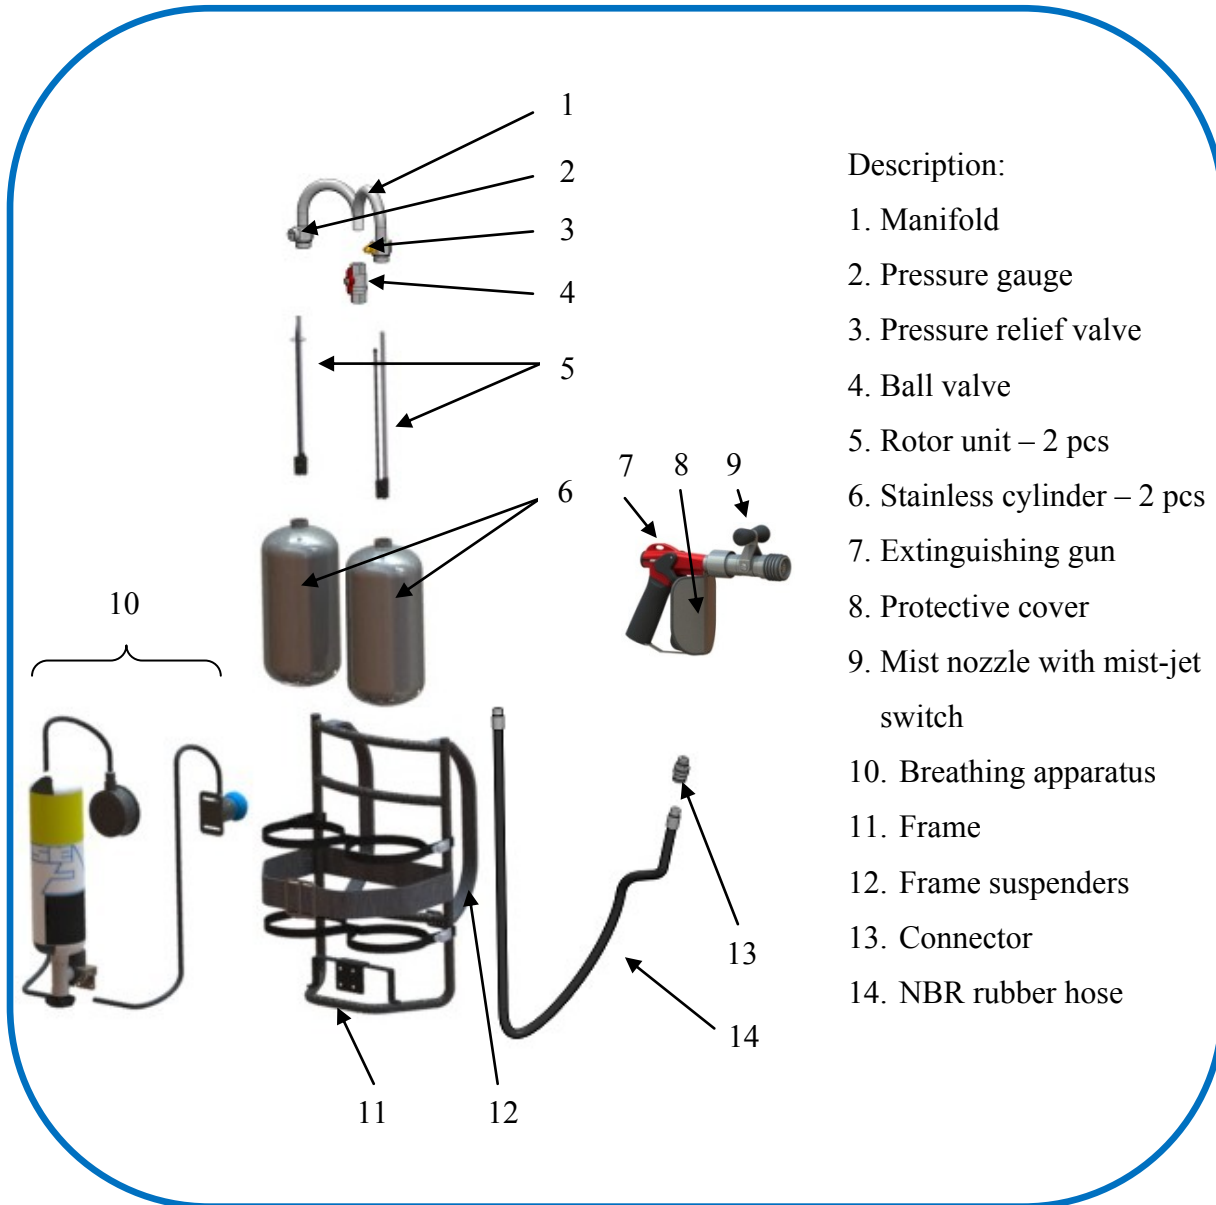

Description:

- 1. Manifold
- 2. Pressure gauge
- 3. Pressure relief valve
- 4. Ball valve
- 5. Rotor unit – 2 pcs
- 6. Stainless cylinder – 2 pcs
- 7. Extinguishing gun
- 8. Protective cover
- 9. Mist nozzle with mist-jet switch
- 10. Breathing apparatus
- 11. Frame
- 12. Frame suspenders
- 13. Connector
- 14. NBR rubber hose

Application		
Fire rating :	21 A, I B	
Types of materials :	Solids	Flam. liquids
Extinguishing live electrical equipment :	No	

The EcoPack can only be used by trained personnel.

Our products are constantly being developed and improved, therefore we reserve the right to change the technical specifications without prior notice.